

# RT3369

ENGINE POWERED ROUGH TERRAIN SERIES

SCISSOR LIFT

**JLG**<sup>®</sup>



## KEY SPECS

**Platform Height – Elevated**  
10 m

**Platform Capacity**  
454 kg indoor   
454 kg outdoor 

**Machine Width**  
1.76 m

**Drive Speed – Stowed**  
5.6 km/h

## KEY FEATURES

- Our engine powered rough terrain models offer drive capability at full height, limiting unnecessary trips up and down for working professionals.
- Delivers the latest technology, featuring an LCD platform control box with LiftSense technology and USB charging for next-level, real-time productivity and service communication to the operator.
- This machine utilizes higher part commonality for simplified service across the rough terrain family.
- An optional QuikLevel Advanced system allows the machine to level on a side slope, helping operators position and drive while elevated closer to the job.

## ACCESSORIES & OPTIONS

- 4 Wheel drive
- QuikLevel Advanced
- Heavy Duty Pipe Racks
- Special Paint
- White Noise backup Alarm
- Hydraulic Oil Cooler
- Hydraulic levelling jacks
- Platform Worklights
- Plugs and Sockets
- SkySense level 2
- 2.5 kW /220V/ 50Hz Belt-driven Generator - Provides power to platform
- Cold weather package
- Panel carrier
- Pipe racks
- Synthetic Biodegradable Hydraulic Oil

## STANDARD SPECIFICATIONS

### Performance

Working Height	12 m
Platform Height – Elevated	10 m
Platform Capacity - indoor 	454 kg
Platform Capacity - outdoor 	454 kg
Capacity on Deck Extension	136 kg
Lift/Lower Time (no load)	42/33 seconds
Maximum Drive Height	Full Height
Machine weight *	4,127 kg
Maximum Ground Bearing Pressure - wheels	2.75 kg/cm <sup>2</sup>
Drive Speed - Stowed	5.6 km/h
Drive Speed - Elevated	0.8 km/h
Gradeability	40%
Turning Radius - Inside	2.1 m
Turning Radius – curb to curb	4.73 m
Max Tilt Rating (side-to-side)	2.5 degrees
Max Tilt Rating (fore & aft)	3 degrees

\* Certain options or country standards may increase weight and/or dimensions.

### Power

Diesel Engine	KUBOTA, T4F 1.26L, 24.8HP
Drive System	2WD Hydrostatic

### Tires

Foam Filled	27 x 12
-------------	---------

### Hydraulic System

Hydraulic Reservoir	50 L
---------------------	------

## STANDARD FEATURES

- 1.06 m Roll-out Deck Extension
- Self-Closing Gate
- Removable platform console box
- Lanyard attach points
- Full proportional drive joystick control with integral thumb steer switch
- Proportional Lift and Drive
- Joystick enable for lift and drive
- Platform Load sensing system
- Two speed drive selection
- Two Wheel Hydrostatic Drive
- Full Time Traction Control
- Programmable "Personality" settings
- On-board self-diagnostic testing
- Sculptured steel hoods
- Tilt alarm and indicator light
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- 26 x 12 Foam Filled Lug Tread Tires - Non marking
- Oscillating front axle
- Tie Down Lugs
- Lubrication-Free Scissor Arm Bushings
- Scissor Maintenance Prop
- AC cable to platform
- Ground control selector switch with key lock
- Hour meter
- Horn
- All motion alarm
- Descent alarm
- Manual Descent Pull Cable
- Flashing Amber Beacon
- Clearsky SMART FLEET connectivity module - Subscription through On Line Express
- Plated Fasteners
- Nickel Plated Pins, Yellow Zinc-Chromate
- Telematics-Ready Harness
- LCD Display with LiftSense System

# RT3369


SCISSOR LIFT

ENGINE POWERED ROUGH TERRAIN SERIES



## DIMENSIONS

All dimensions are approximate

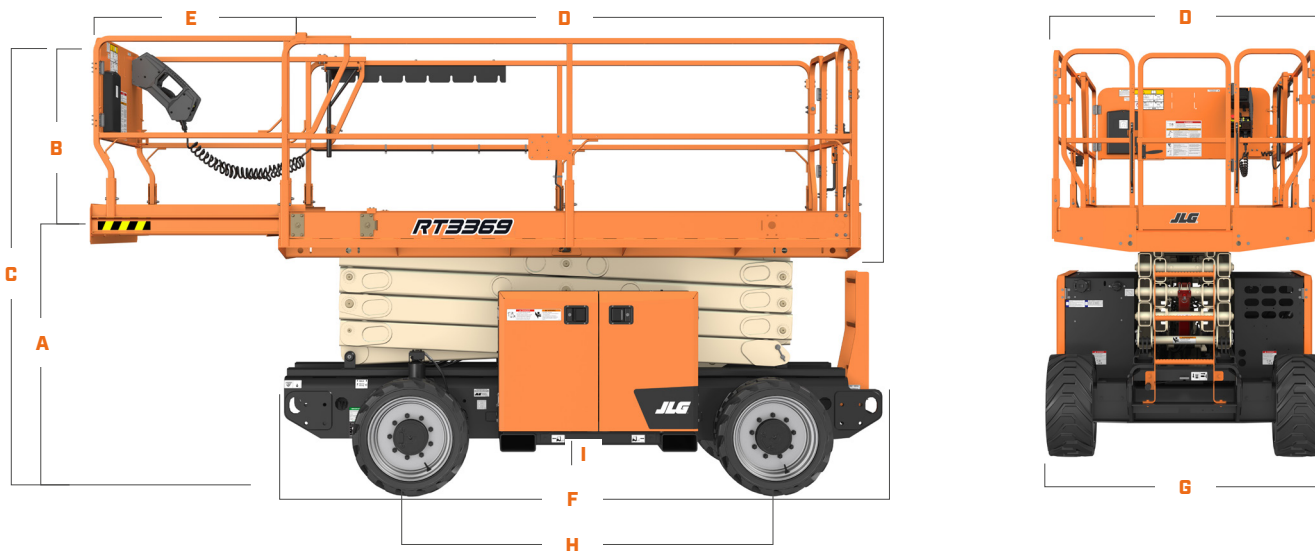

<b>A.</b>	Platform Height - Lowered	1.55 m
<b>B.</b>	Platform Railing Height	1.14 m
<b>C.</b>	Stowed Height	2.62 m
<b>D.</b>	Platform Size (W X L)	3.3 x 1.6 m
<b>E.</b>	Deck Extension	1.07 m
<b>F.</b>	Overall Length	3.53 m
<b>G.</b>	Overall Width	1.76 m
<b>H.</b>	Wheelbase	2.07 m
<b>I.</b>	Ground Clearance (centre of machine)	25.6 cm

### IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.



### JLG EMEA BV

Polaris Avenue 63  
2132 JH Hoofddorp  
The Netherlands  
Tel.: +31 (0)23 565 5665  
[www.jlg.com](http://www.jlg.com)

An Oshkosh Corporation Company