




TECHNICAL DATA

GENERAL		C 351 H x4
Load capacity to 500 mm	kg	3500
Load capacity to 600 mm	kg	3230
Unladen weight *	kg	5430
Transmission	-	Hydrostatic
MAST		
Fork carriage	-	FEM 3
Carriage width	mm	1260/1600
ENGINE		
Make	-	KUBOTA
Model	-	V2403-CR E5B
Power	kW	31,2
Operating speed	rpm	2200
Torque	N-m@rpm	159,8@1600
No. cylinders	-	4
Emissions	-	Stage V
Ambient noise	dB(A)	104
DRIVING		
Max. speed	km/h	20
Gradability	%	35
Traction	-	4x4 FullGrip®
Front tyres	-	16/70-20
Rear tyres	-	12-16,5
HYDRAULIC SYSTEM		
Hydraulic circuit	-	Two gears pump
Flow rate	l/min	50
Working pressure	bar	200
TANK CAPACITY		
Fuel	l	62
Hydraulic	l	51
BRAKES		
Service	-	Hydraulic, multi-disc and sealed
Parking	-	Negativ, multi-disc and sealed

* It may change due to optional equipment

DIMENSIONS

TYPE OF MAST	Maximum lift (mm)	H Retracted mast height (mm)	Extended mast height (mm)	Free lift (mm)	Load at maximum height @ 500 mm (kg)	
					All-terrain use Narrow axle	Wide axle
Duplex mast (Std.)	3300	2670	4570	120	3500	-
Triplex mast	3700	2130	4970	1200	3500	-
Triplex mast	5400	2700	6670	1680	-	1400

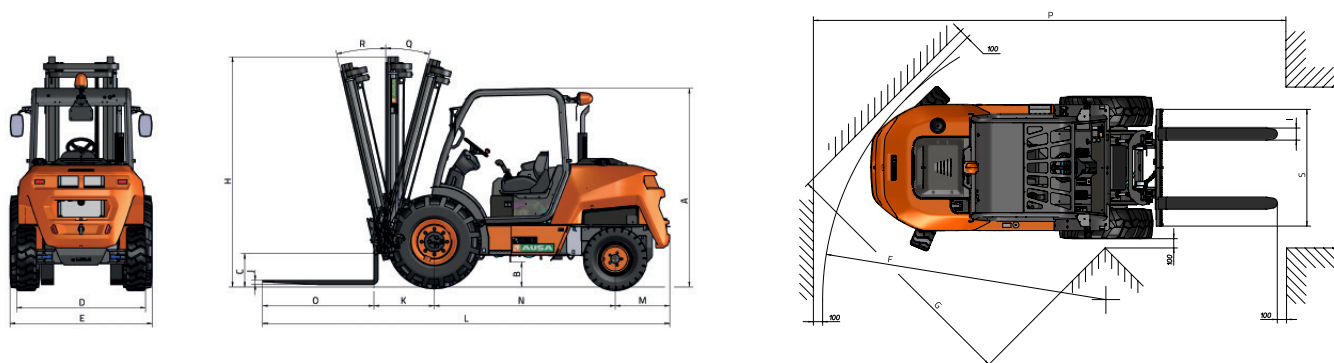

DIMENSIONS (mm)		C 351 H x4
A		2190
B		320
C		375
D		1645
E		1780
E**		2050
F		4350
G		3090
I		120
J		50
K		710
L		4540
M		615
N		2020
O		1200
P		6645
S		1310
S***		1710
DIMENSIONS (°)		
Q		11
R		12

** Measured with high-lift mast installed

***Measured for wide axle carriage



www.ausa.com

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.

MKCAT.C351H.EU.0522EN