

Model ES1330L

LIGHT WEIGHT ELECTRIC SCISSOR LIFTS



MORE ECONOMIC

- Electric power for zero emissions and near-silent running indoors.

MORE PRODUCTIVE

- Boost efficiency with direct electric drive.

MORE ACCESS

- Get into more places with compact dimensions and precise control system.

SMART DESIGN

- Enjoy industry leading upcycles so you can work longer with higher productivity.

Preliminary version



Standard Features

- Proportional Controls
- Battery Condition Indicator
- 27 amp Multi-Function Universal Charger
- Horn
- Hourmeter
- Tilt Alarm and Light
- Lanyard Attach Points
- Movable, Removable Platform Control
- Variable tilt System
- Lubrication Free Scissor Arm Brushings
- Scissor Maintenance Prop
- Coiled Platform Control Box Cable
- Flashing Amber Beacon
- 55 cm Actuated Deck Extension
- Removable Ladder
- Pothole Protection system
- Fork Lift Pockets
- Steel Swing-Out Doors
- Manual Descent Cable
- Diamond Tread Steel Deck
- Greaseless Kingpin Joints
- Analyzer Port for Diagnostics
- Dynamic Braking
- Cut Out Load Sensing System*
- Gate Latch

* Platform and Ground controls are prevented in the event of an overload.

Standard Specifications

- | | |
|--------------------------------|------------------------------|
| • Drive Motors | 24V Electric |
| • Batteries | 2 x 12V 130Ah |
| • Charger (120/240V – 50/60HZ) | 27 amp (Universal Algorithm) |
| • Hydraulic System | 5 L |
| • Tyres (Non-Marking Solid) | 255 x 76 mm |
| • Brakes | Electric/Friction |

Accessories & Options

- | | |
|--------------------------------|-------------------------------|
| • Flashing Amber Beacon (dual) | • AC Outlet in the platform |
| • Ambient Noise Alarm | • Lifting and Tie Down Points |
| • Batteries (2x12V 115Ah AGM) | • Anti vandalism package |
| • MDI (Ground) | • ClearSky Locate |
| • Drive Motor Covers | • ClearSky CAN |

Model ES1330L

LIGHT WEIGHT ELECTRIC SCISSOR LIFTS

Performance


- Working Height 5.8 m
- Platform Height - Elevated 3.8 m
- Dimensions:
 - A. Platform Height – Lowered 0.70 m
 - B. Platform Railing Height 1.1 m
 - C. Stowed Height (Rails Folded) 1.8 m
 - D. Platform Size (W x L) 0.61 m x 1.26 m
 - E. Deck Extension 0.55 m
 - F. Overall Width 0.76 m
 - G. Overall Length 1.46 m
 - H. Wheelbase 1.08 m
 - I. Ground Clearance 0.61 m
- Platform Capacity - Indoor  227 kg
- Platform Capacity - Outdoor  227 kg
- Capacity on Optional Deck Extension 115 kg
- Lift/Lower Time 17/11 sec.**
- Maximum Drive Height Fully Elevated
- Machine weight * 896 kg
- Maximum Ground Bearing Pressure 8.4 kg/cm²
- Drive Speed - Lowered 3.8 km/h
- Drive Speed - Elevated 0.8 km/h
- Gradeability 25%
- Turning Radius - Inside Zero
- Turning Radius - Outside 1.4 m

* Certain options or country standards may increase weight and/or dimensions.

** Without load

Preliminary version

Dimensions

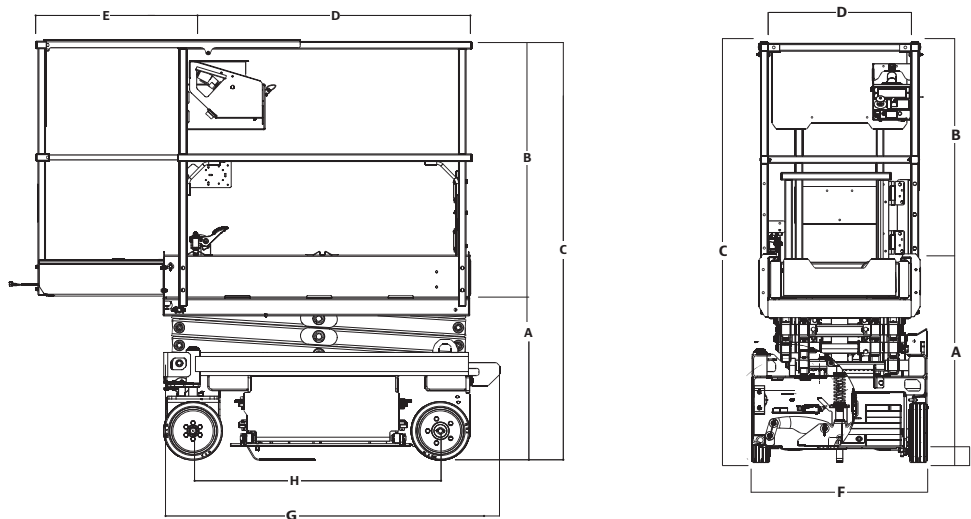

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.

JLG EMEA BV

Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands
Tel.: +31 (0)23 565 5665
www.jlg.com

An Oshkosh Corporation Company