

Model ES1530L

LIGHT WEIGHT ELECTRIC SCISSOR LIFTS



MORE ECONOMIC

- Electric power for zero emissions and near-silent running indoors.

MORE PRODUCTIVE

- Boost efficiency with direct electric drive.

MORE ACCESS

- Get into more places with compact dimensions and precise control system.

SMART DESIGN

- Enjoy industry leading upcycles so you can work longer with higher productivity.

Preliminary version



Standard Features

- Proportional Controls
- Battery Condition Indicator
- 27 amp Multi-Function Universal Charger
- Horn
- Hourmeter
- Tilt Alarm and Light
- Lanyard Attach Points
- Movable, Removable Platform Control
- Variable tilt System
- Nickel Plated Pins
- Lubrication Free Scissor Arm Brushings
- Scissor Maintenance Prop
- Coiled Platform Control Box Cable
- Flashing Amber Beacon
- 55 cm Actuated Deck Extension
- Removable Ladder
- Pothole Protection system
- Fork Lift Pockets
- Steel Swing-Out Doors
- Manual Descent Cable
- Diamond Tread Steel Deck
- Greaseless Kingpin Joints
- Analyzer Port for Diagnostics
- Dynamic Braking
- Cut Out Load Sensing System*
- Gate Latch

* Platform and Ground controls are prevented in the event of an overload.

Standard Specifications

- Drive Motors
- Batteries
- Charger (120/240V – 50/60HZ)
- Hydraulic System
- Tyres (Non-Marking Solid)
- Brakes
- 24V Electric
- 2 x 12V 130Ah
- 27 amp (Universal Algorithm)
- 5 L
- 255 x 76 mm
- Electric/Friction

Accessories & Options

- Flashing Amber Beacon (dual)
- Ambient Noise Alarm
- Batteries (2x12V 115Ah AGM)
- MDI (Ground)
- Drive Motor Covers
- AC Outlet in the platform
- Lifting and Tie Down Points
- Anti vandalism package
- ClearSky Locate
- ClearSky CAN

Model ES1530L

LIGHT WEIGHT ELECTRIC SCISSOR LIFTS

Performance


- Working Height (Indoor/ Outdoor) 6.5 m / 5.4 m
- Platform Height - Elevated (Indoor/ Outdoor) 4.5 m / 3.4 m
- Dimensions:
 - A. Platform Height – Lowered 0.79 m
 - B. Platform Railing Height 1.1 m
 - C. Stowed Height (Rails Folded) 1.9 m
 - D. Platform Size (W x L) 0.61 m x 1.26 m
 - E. Deck Extension 0.55 m
 - F. Overall Width 0.76 m
 - G. Overall Length 1.46 m
 - H. Wheelbase 1.08 m
 - I. Ground Clearance 0.61 m
- Platform Capacity - Indoor  227 kg
- Platform Capacity - Outdoor  227 kg
- Capacity on Optional Deck Extension 115 kg
- Lift/Lower Time 19/13 sec. **
- Maximum Drive Height Fully Elevated
- Machine weight * 880 kg
- Maximum Ground Bearing Pressure 8.86 kg/cm²
- Drive Speed - Lowered 3.8 km/h
- Drive Speed - Elevated 0.8 km/h
- Gradeability 25%
- Turning Radius - Inside Zero
- Turning Radius - Outside 1.4 m

* Certain options or country standards may increase weight and/or dimensions.

** Without load

Preliminary version

Dimensions

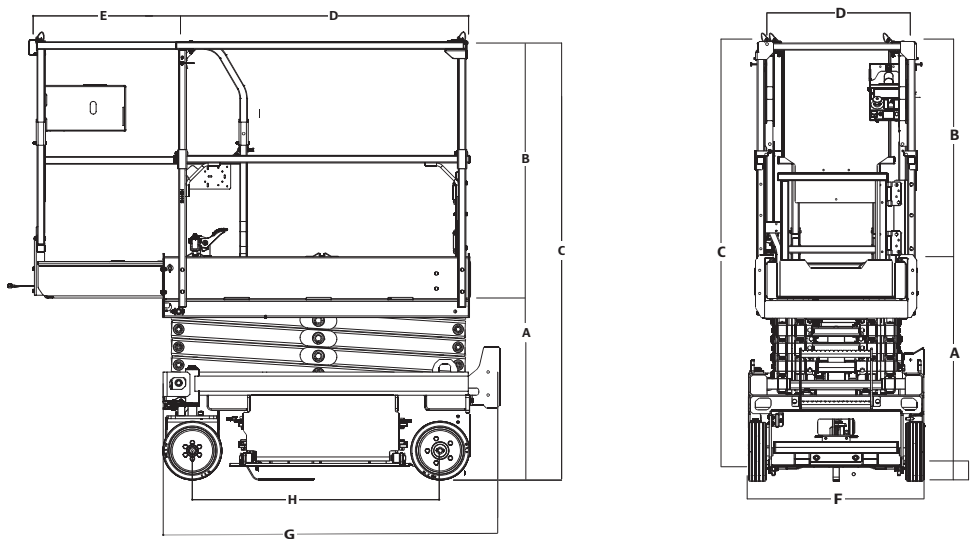

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.



JLG EMEA BV

Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands
Phone: +31 (0)23 565 5665
www.jlg.com

An Oshkosh Corporation Company